


BIFACIAL MONO CRYSTALLINE DOUBLE GLASS MODULE - SHINGLED CELL TECHNOLOGY

645 / 650 / 655 / 660 / 665 / 670 / 675 Watts

Shingled Series

Overview

Shingled technology eliminates traditional ribbon connection with shingles connected series. By removing the soldered ribbons, The active area of the module is improved and thermal stresses are reduced-resulting in exceptional efficiency and reliability over standard interconnections.

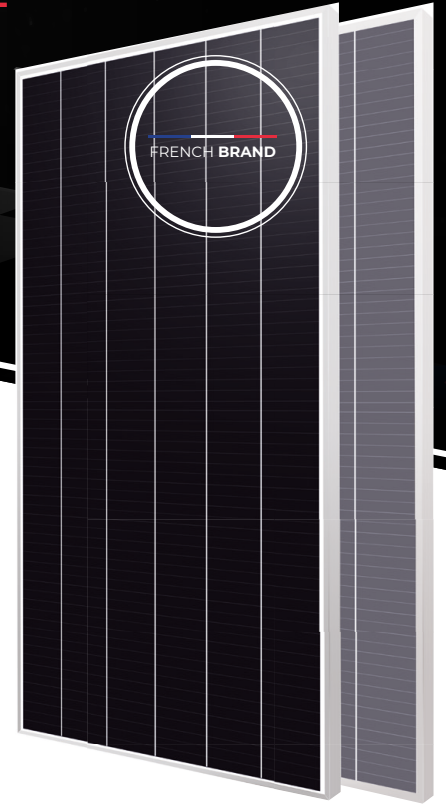



Guaranteed mechanical resistance to severe weather conditions



Positive Tolerance



100 % electroluminescence tested

Key benefits



Zero Light Induced Degradation



0% Front Grid Shading Loss



Low LCOE



25 Years Limited Product Warranty



LowPmax Temperature Coefficient



Higher Light Conversion




Tests, Certifications and Guarantees

Standard tests	IEC 61215, IEC 61730
Factory quality testing	ISO 9001: 2015. ISO 14001: 2015
Certifications	Conformity to CE. PV CYCLE Fire safety Class C according to UNI9177
Wind and Snow Loads Testing	Module certified to withstand extreme wind [2400 Pascal] and snow loads [5400 Pascal]
Withstanding Hail	Maximum Diameter of 25mm with impact speed of 23m/s
Power Tolerance	Guaranteed +0/+5W [STC condition]

Warranties

- ✓ 30-year limited product warranty
- ✓ 15-year manufacturer warranty on 94, 10% of the nominal performance
- ✓ Linear power output guarantee over 30 years

Linear performance guarantees

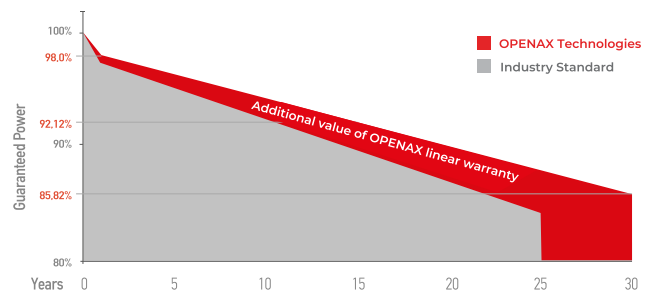

Production 1st year	≥ 98.0%	Power between 2 and 25 years	≤ 0.42%	Power output at 25 years	≥ 85.82%
---------------------	---------	------------------------------	---------	--------------------------	----------

BIFACIAL N-TYPE MONO CRYSTALLINE DOUBLE GLASS MODULE - SHINGLED CELL TECHNOLOGY

OX-xxx-G12SHGBVB(xxx=645-675)

Electrical performance

POWER CLASS ⁽¹⁾		645		650		655		660		665		670		675	
Measurement condition		STC ⁽²⁾	NMOT ⁽³⁾	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power	Pmax [Wp]	645	486	650	489	655	493	660	497	665	501	670	504	675	508
Voltage at Pmax	Vmp [V]	38,7	36,9	38,8	37,0	38,8	37,0	38,9	37,1	39,0	37,2	39,1	37,3	39,2	37,3
Current at Pmax	Imp [A]	16,68	13,17	16,77	13,25	16,89	13,32	16,98	13,39	17,07	13,46	17,16	13,54	17,26	13,61
Open Circuit Voltage	Voc [V]	46,6	44,3	46,7	44,4	46,8	44,5	46,9	44,7	47,0	44,8	47,1	44,9	47,2	45,0
Short circuit current	Isc [A]	14,74	14,29	17,84	14,37	17,97	14,47	18,06	14,55	18,16	14,63	18,26	14,71	18,36	14,79
Surface efficiency	Eff [%]	20,8		20,9		21,1		21,2		21,4		21,6		21,7	
Max. Reverse Current	Ir [A]	30													
System voltage max	Vsys [V]	1500V CD (IEC)													

(1) Measurement tolerances: Pmax (± 3%), Isc & Voc (± 3%) - Power classification 0/+5W

(2) STC (Standard Test Conditions): Irradiance 1000W/m² Cell Temperature 25°C, AM 1.5

(3) NMOT (Nominal Module Operating Temperature): Irradiance 800W/m² Ambient Temperature 20°C, AM

Bi Facial Output (4)


POWER CLASS		645		650		655		660		665		670		675	
		Pmax (Wp)	Eff (%)	Pmax (Wp)	Eff (%)	Pmax (Wp)	Eff (%)	Pmax (Wp)	Eff (%)	Pmax (Wp)	Eff (%)	Pmax (Wp)	Eff (%)	Pmax (Wp)	Eff (%)
Power with Backside Gain	+5 (%)	677,3	21,8%	682,5	22,0%	687,2	22,1%	693,0	22,3%	698,3	22,5%	703,5	22,6%	708,8	22,8%
	+10 (%)	709,5	22,8%	715,0	23,0%	720,5	23,2%	726,0	23,4%	731,5	23,5%	737,0	23,7%	742,5	23,9%
	+15 (%)	741,8	23,9%	747,5	24,1%	753,3	24,2%	759,0	24,4%	764,8	24,6%	770,5	24,8%	776,3	25,0%
	+20 (%)	774,0	24,9%	780,0	25,1%	786,0	25,3%	792,0	25,5%	798,0	25,7%	804,0	25,9%	810,0	26,1%
	+25 (%)	806,3	26,0%	812,5	26,2%	818,8	26,4%	825,0	26,6%	831,3	26,8%	837,5	27,0%	843,8	27,2%
	+30 (%)	838,5	27,0%	845,0	27,2%	851,5	27,4%	858,0	27,6%	864,5	27,8%	871,0	28,0%	877,5	28,2%

(4) Bifaciality Factor > 90% - Back-side power gain depends upon the specific project albedo - Efficiency is according to the module

Mechanical characteristics

Dimensions	2384mm x 1303 x 35mm
Weight	38,5 Kg
Cells	PERC Mono - 210x35mm - 414pcs - G12
Front panel	2.0mm Tempered and low iron glass + ARC
Rear panel	2.0mm Tempered and low iron glass
Frame	Anodized aluminum alloy
Junction box	IP68 - 3 Bypass Diodes
Connectors	MC4 Compatible
Cables	Cross-section: 4mm ² , +300mm/-1000mm(V), +220/-180mm(H) or customized

Dimensions

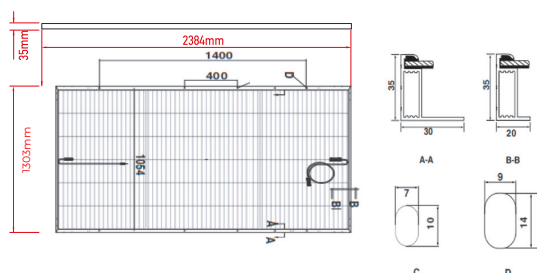


OPENAX assumes no responsibility for any typographical, formatting, misinformation, or any other errors or omissions contained herein.

www.openax.com

Specifications and key features described in this data sheet may vary slightly and are not guaranteed. Due to continuous product innovation, research and improvement, OPENAX reserves the right to make adjustments to the information described herein at any time and without notice. Please always obtain the most recent version of the technical data sheet, which must be duly incorporated into the contract.

I-V curve

Power loss in low-light environments: 200W/m² is less than 3%.

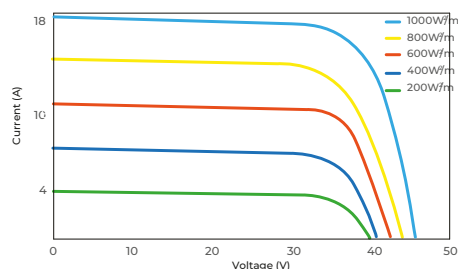

Thermal coefficients

Coeff./ Pmax	-0.34% /°C
Coeff./ Voc	-0.27% /°C
Coeff./ Isc	+0.04% /°C
Operating temperature	-40~+85 °C
Nominal module operating temperature (NMOT)	42.3 ± 2 °C

Packaging configuration

Container	40' (HC)
Pieces per Pallet	31
Pallets per Container	18
Pieces per Container	558